




# Entry Sensor

## USL-Entry

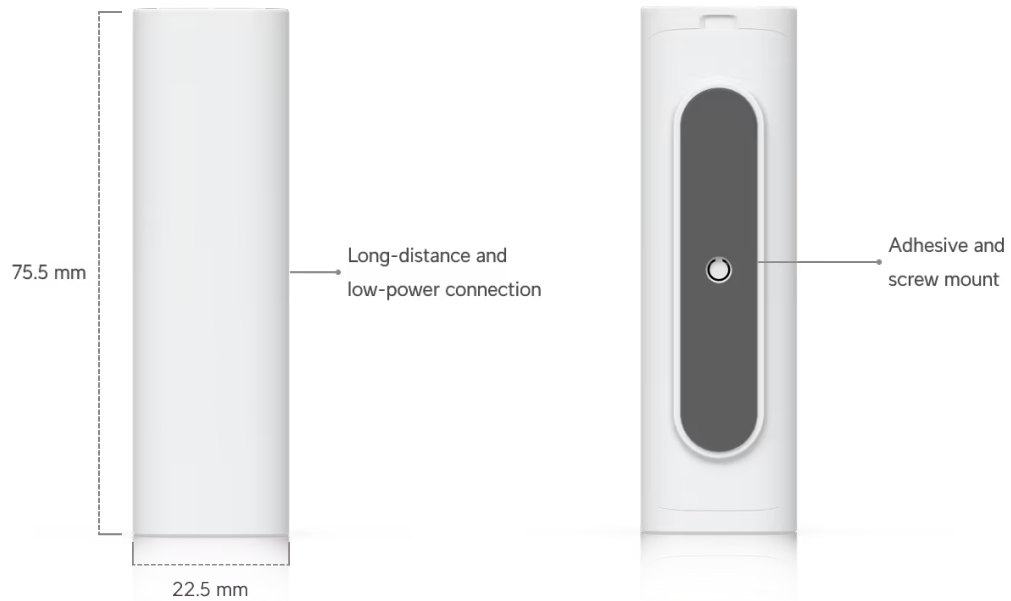

### Overview

Dimensions	Device: 75.5 x 23.5 x 22.5 mm (3 x 0.93 x 0.89") Magnet: 39 x 15.1 x 12.9 mm (1.5 x 0.6 x 0.5")
Mounting	Adhesive and screw mount
UniFi Application Suite	Protect

### Performance

Connectivity	SuperLink (Proprietary)
Operating Frequency	
<ul style="list-style-type: none"><li>US</li></ul>	915.6–927.6 MHz

• EU	865.1–869.5 MHz
Antenna Gain	
• SuperLink	0 dBi
Max. TX Power	
• SuperLink	14 dBm
Max. Range	
• SuperLink	2 km (1.2 mi)
Sensor Features	
• Reed Switch	✓

## Hardware

Max. Power Consumption	27.7mW
Supported Voltage Range	3V
Power Method	Lithium battery CR123A
Battery Life	Up to 6 years
Weight	Device: 41 g (1.4 oz) Magnet: 22 g (0.8 oz)
Enclosure Material	Polycarbonate
Mount Material	Polycarbonate
Button	(1) Factory-reset (1) Function button (1) Tamper switch
LEDs	(1) Status: R/B/W (1) Signal: B/R
Ambient Operating Temperature	0 to 40° C (32 to 104° F)
Ambient Operating Humidity	10 to 90% noncondensing

Certifications

FCC, IC, CE

NDA Compliant

✓

---

## Software

Application Requirements

- Web Application

UniFi Protect

- Mobile App

UniFi Protect iOS™ and Android™

For more information about this product or other Ubiquiti products, please visit: <https://techspecs.ui.com>