


DESCRIPTION

Linkbasic's 'Bow Type' Single Mode drop cable is designed for FTTX applications. The outer jacket is suitable for both indoor and outdoor installations when used in ducting. The cable is reinforced with two phosphate wires to improve crush resistance, pull strength and provide high bend tolerance during installation.

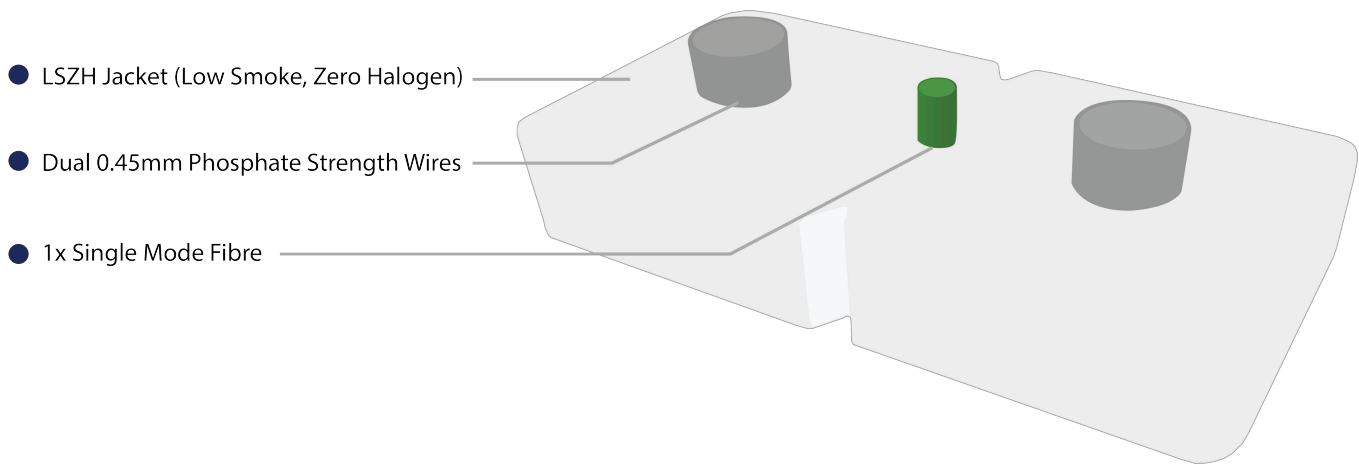

SPECIFICATIONS

Fibre Type	Single Mode (G657A2)
Fibre Count	1
Fibre Attenuation	1310/1550nm: $\leq 0.35/0.22$ db/km
Jacket Material	Low Smoke Zero Halogen (LSZH)
Strength Member	Dual 0.45mm Phosphate Wires
Outer Diameter (mm)	2mm x 3mm
Temp. Range	-40~+60 °C