

OUR REF: TAP/04/2025/SCOOP

ENQ: SHELEEN KAVIKAIRIUA

11th April 2025

MR. SAM SHIVUTE

Commissioner
Namibia Revenue Agency
Moltke Street, Windhoek
Namibia

PER EMAIL:

Johanna.Amukushu@namra.org.na

Dear Custom Officials,

TYPE APPROVAL EXEMPTION – SCOOP DISTRIBUTION

Kindly note that the Authority has reviewed the documentations describing equipment to be imported into Namibia by Scoop Distribution and hereby confirms that the following model: RG-ES200 Series does not require type approval.

This letter therefore, serves only as an exemption for the equipment mentioned above and may not be used for other consignments without the consent of the Authority.

In light of trade facilitation, the Authority thus requests Customs to please allow the equipment to pass the border as they do not require Type Approval.

For any further information or clarity please do not hesitate to contact Ms. Sheleen Kavikairiua, Manager: Licensing Standards & Regulatory Compliance, at Tel: 061 222 666 or via email: skavikairiua@cran.na

Yours faithfully,



MRS. EMILIA NGHIKEMBUA
CHIEF EXECUTIVE OFFICER



Board Members:

Dr. Tulimevava Mufeti (Chairperson); Mr. Elvis Nashilongo (Vice-Chairperson); Ms. Jeanine Du Toit (Member);
Ms. Florette Nakusera (Member); Mr. Gerhard Coeln (Member); Ms. Aletha Haufiku (Member); Mr. Veiko Alexander (Member)


Chief Executive Officer: Mrs. Emilia Nghikembua

Executive: Governance, Risk & Compliance Management: Mr. Tanswell Davies



RG-ES200 Series Smart Cloud Managed Switches

Unique Value for CCTV Network

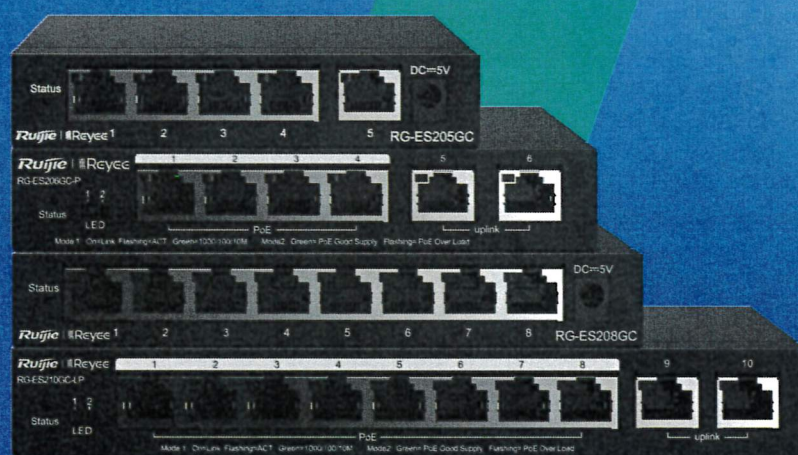

Highlights

- Abundant models fit needs for access layer in SMB network
- Cost-Effective Smart Cloud Managed Switches
- IP Camera Recognition, Unique Value for CCTV Network
- Automatic Loop Prevention Ensures Service Continuity
- Lifetime management on Ruijie Cloud at anytime anywhere

Specifications

Basic

| Model | RG-ES210GS-P | RG-ES216GC-V2/V1 | RG-ES218GC-P | RG-ES220GS-P | RG-ES224GC-V2/V1 | RG-ES226GC-P | RG-ES228GS-P |
|-------------------------|-------------------------|-------------------------|---------------------------|---------------------------|-------------------------|---------------------------|---------------------------|
| 10/100/1000Base-T ports | 10 | 16 | 16 | 18 | 24 | 24 | 26 |
| 1000Base-X SFP ports | 1 combo SFP | - | 2 | 2 | - | 2 | 2 |
| PoE/PoE+ ports | 8 | - | 16 | 16 | - | 24 | 24 |
| Max. PoE budget | 120W | - | 240W | 250W | - | 370W | 370W |
| Layer Type | Layer 2 | Layer 2 | Layer 2 | Layer 2 | Layer 2 | Layer 2 | Layer 2 |
| Switching capacity | 20 Gbps | 32 Gbps | 36 Gbps | 40 Gbps | 48 Gbps | 52 Gbps | 56 Gbps |
| Forwarding rate | 14.8 Mpps | 23.81 Mpps | 26.78 Mpps | 29.76Mpps | 35.71 Mpps | 38.69 Mpps | 41.664Mpps |
| Packet Buffer | 1.5Mbit | 4.1 Mbit | 4.1 Mbit | 4.1 Mbit | 4.1 Mbit | 4.1 Mbit | 4.1 Mbit |
| MAC address table | 4000 | 8000 | 8000 | 8000 | 8000 | 8000 | 8000 |
| Maximum VLAN Support | 16 | 16 | 16 | 16 | 16 | 16 | 16 |
| Dimensions (W x D x H) | 202 mm x 108 mm x 28 mm | 440 mm x 165 mm x 44 mm | 300 mm x 230 mm x 43.6 mm | 300 mm x 223 mm x 43.6 mm | 440 mm x 165 mm x 44 mm | 440 mm x 289 mm x 43.6 mm | 440 mm x 214.9 mm x 44 mm |
| Weight (With package) | 1.38kg | 2.7 kg | 3.5 kg | 2.8kg | 2.8 kg | 4.2 kg | 4.0kg |
| MTBF | > 200,000 | > 200,000 | > 200,000 | > 200,000 | > 200,000 | > 200,000 | > 200,000 |
| Warranty | 3 Years | 3 Years | 3 Years | 3 Years | 3 Years | 3 Years | 3 Years |

Software Features

| | | | | | | | |
|--|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 10/100/1000M Auto/Full/Half Duplex Negotiation | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Flow Control | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Storm Suppression | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Management IP | 10.44.77.200 | 10.44.77.200 | 10.44.77.200 | 10.44.77.200 | 10.44.77.200 | 10.44.77.200 | 10.44.77.200 |
| VLAN Range | 1 - 4094 | 1 - 4094 | 1 - 4094 | 1 - 4094 | 1 - 4094 | 1 - 4094 | 1 - 4094 |
| Port-based VLAN | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |