




SuperLink

UP-SL

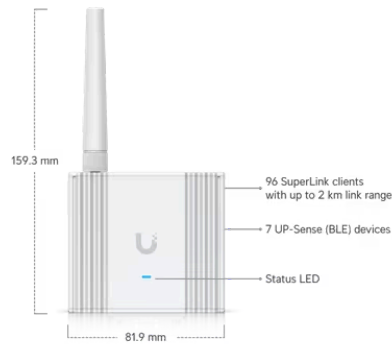

Mechanical

Dimensions	With antenna: 159.3 x 81.9 x 26 mm (6.3 x 3.2 x 1") With DIN rail mount: 159.3 x 81.9 x 38.5 mm (6.3 x 3.2 x 1.5") With wall mount: 159.3 x 81.9 x 30.5 mm (6.3 x 3.2 x 1.2")
Weight	179 g (6.3 oz)
Enclosure material	Polycarbonate, aluminum alloy
Mount material	Polycarbonate

Hardware

Networking interface	(1) 10/100 MbE RJ45 port
Management interface	Bluetooth® 5.2 SuperLink (Proprietary)
Power method	PoE USB Type-C, 5V, 1A (Optional)
Max. power consumption	3.4W
ESD/EMP protection	Air: ± 8kV Contact: ± 4kV
Antenna gain	
Bluetooth	3 dBi
SuperLink	1 dBi
Max. TX power	
Bluetooth	10 dBm
SuperLink	27 dBm

Max. client count	
Bluetooth	7
SuperLink	96*
	*SuperLink sensors are coming soon.

LED	(1) Blue/white
Button	(1) Factory reset
Mounting	Wall, DIN rail
Ambient operating temperature	0 to 40° C (32 to 104° F)
Ambient operating humidity	10 to 90% noncondensing
Certifications	FCC, IC, CE
NDAA Compliant	Yes

Software

Web application	UniFi Protect
Mobile app	UniFi Protect iOS™ and Android™