




AI LPR

UVC-AILPR-B

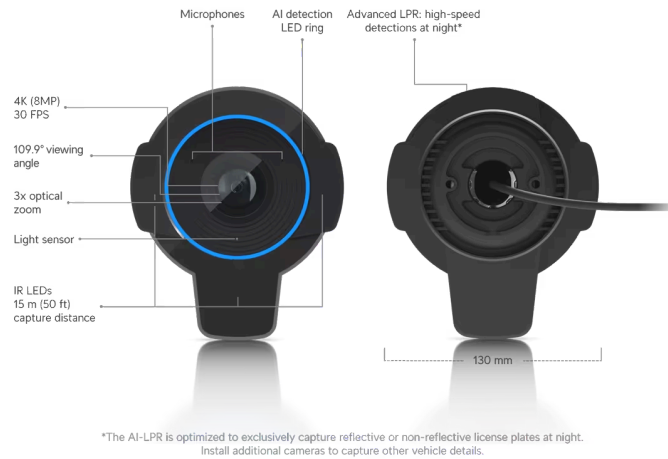

^ Overview

Dimensions	130 x 151.4 x 302.9 mm (5.1 x 6 x 11.9")
IR Night Vision	15 m (50 ft)
Optical Zoom	3x
License Plate Recognition	✓
Smart Detections (People, Vehicles, Animals)	✓
Resolution	4K
Field of View	Wide: H 109.9°, V 60°, D 127.7° Tele: H 35°, V 19.8°, D 40°
Audio	Microphone
Weatherproofing	IP66
Tamper Resistance	IK04
Mounting	Wall, ceiling, pole mount (Included) Junction box, angled base (Optional)

^ Performance

Networking Interface	GbE RJ45 port
Video	
Image Settings	Color, brightness, sharpness, contrast, white balance, exposure control, 2DNR, 3DNR, NR by motion, masking, text overlay
Max. Frame Rate	30 FPS
Resolution	8MP 3840 x 2160 (16:9)
Optics	
Sensor	1/1.8" 8MP
Lens	F 4.1-12.3 mm; f/1.53-f/3.3
IR Capture Distance	15 m (50 ft)
LPR Night Mode	LPR optimization filter
^ Hardware	
Max. Power Consumption	25.5W
Supported Voltage Range	42.5-57V DC
Power Method	PoE+
Processor	Quad-core Arm® Cortex®-A53 based chip
Pole Mount Diameter	1.5-2" (38-50 mm)
Weight	1.5 kg (3.3 lb)
Enclosure Material	Aluminum alloy, polycarbonate
Mount Material	Aluminum Alloy
Button	(1) Factory-reset
Ambient Operating Temperature	-20 to 50° C (-4 to 122° F)
Ambient Operating Humidity	10 to 90% noncondensing
Certifications	CE, FCC, IC
NDAA Compliant	✓
Cable	
Cable Connector Type	RJ45
Cable Diameter	4.5 mm (0.2")

Cable Length	30 cm (1 ft)
Jacket Material	Thermoplastic elastomer
Jacket Enclosure Dimensions	Ø20 x 70.6 mm (0.8 x 2.8")
Jacket Enclosure Material	Thermoplastic elastomer, polycarbonate, silicone rubber
Expansion Slot	Micro SD memory card