




# G5 PTZ

## UVC-G5PTZ-B

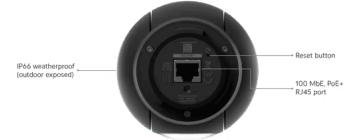

### ^ Overview

	Without mount: Ø90 x 152.5 mm (Ø3.5 x 6")
Dimensions	With mount: 90 x 94 x 179.5 mm (3.5 x 3.7 x 7")
IR Night Vision	20 m (65 ft)
Optical Zoom	2K
Smart Detections (People, Vehicles, Animals)	✓
Resolution	2K
Field of View	Wide: H: 99.7°, V: 51.9°, D: 121° Tele: H: 45.5°, V: 25.4°, D: 52.4°
Audio	Microphone
Weatherproofing	IP66
Tamper Resistance	IK04
Mounting	Wall mount, pole mount (Included) Conduit adapter, surface, in-ceiling, pendant, corner mount (Optional)
UniFi Application Suite	Protect
<b>^ Performance</b>	
Networking Interface	10/100 MbE RJ45 port
Video	
Max. Frame Rate	30 FPS

Resolution	4MP 2688 x 1512 (16:9)
Optics	
Sensor	5MP 1/2.7" CMOS
Lens	F 3.42-6.85 mm; f/1.85-f/2.4
Night Mode	Built-in IR & white LED illumination with IR cut filter

#### ^ **Hardware**

Max. Power Consumption	14W
Supported Voltage Range	37—57V DC
Power Method	PoE+
Pole Mount Diameter	1.5-2" (38-50 mm)
Weight	Without mount: 580 g (1.3 lb) With mount: 650 g (1.4 lb)
Enclosure Material	Aluminum alloy, polycarbonate
Mount Material	Wall mount: polycarbonate Pole mount: aluminum alloy
Button	(1) Factory-reset
Ambient Operating Temperature	-30 to 45° C (-22 to 113° F)
Ambient Operating Humidity	0 to 90% noncondensing
Certifications	CE, FCC, IC