




G6 Bullet

UVC-G6B-W

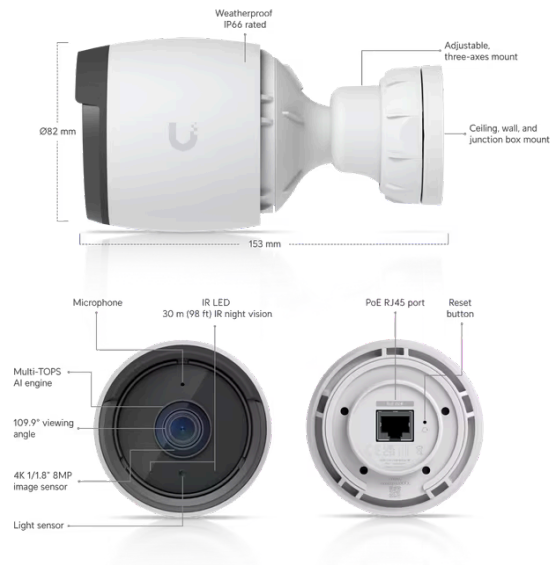

Overview

| | |
|--|--|
| Dimensions | Without mount: Ø82 x 88.8 mm (Ø3.2 x 3.5") With mount: Ø82 x 153 mm (Ø3.2 x 6") |
| IR Night Vision | 30 m (98 ft) |
| Face Recognition | ✓ |
| License Plate Recognition | ✓ |
| Smart Detections (People, Vehicles, Animals) | ✓ |
| Resolution | 4K |
| Field of View | H: 109.9°, V: 56.7°, D: 134.1° |
| Audio | Microphone |
| Weatherproofing | IP66 |
| Tamper Resistance | IK04 |
| Mounting | Wall, ceiling, pole mount (Included) Junction box, angled base (Optional) |

^ Performance

| | |
|----------------------|---|
| Networking Interface | 10/100 MbE RJ45 port |
| Video | |
| Image Settings | Color, brightness, sharpness, contrast, white balance, exposure control, 2DNR, 3DNR, NR by motion, masking, text overlay, HDR |
| Max. Frame Rate | 30 FPS |
| Resolution | 8MP 3840 x 2160 (16:9) |

Optics

| | |
|------------|--|
| Sensor | 1/1.8" 8MP |
| Lens | Fixed focal length |
| Night Mode | Built-in IR LED illumination and IR cut filter |

^ Hardware

| | |
|-------------------------------|---|
| Max. Power Consumption | 9.9W |
| Supported Voltage Range | 37-57V DC |
| Power Method | PoE |
| Processor | Quad-core Arm® Cortex®-A53 based chip |
| Pole Mount Diameter | 1.5-2" (38-50 mm) |
| Weight | Without mount: 587 g (1.3 lb) With mount: 737 g (1.6 lb) |
| Enclosure Material | Polycarbonate, aluminum alloy |
| Mount Material | Wall mount: aluminum alloy, polycarbonate Pole mount: aluminum alloy |
| Button | (1) Factory-reset |
| Ambient Operating Temperature | -20 to 50° C (-4 to 122° F) |
| Ambient Operating Humidity | 0 to 90% noncondensing |
| NDAA Compliant | ✓ |