




G6 Pro Bullet

UVC-G6-Pro-Bullet-B

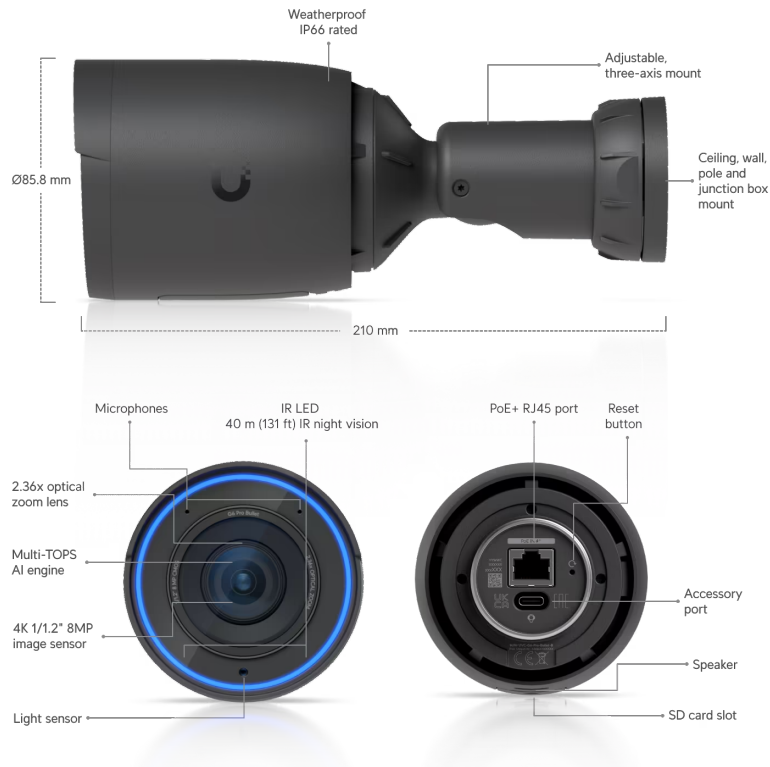

Overview

Dimensions

Without mount: Ø85.8 x 106.2 mm (Ø3.4 x 4.2")
With wall mount: Ø85.8 x 210 mm (Ø3.4 x 8.3")

IR Night Vision

40 m (131 ft)
Up to 60 m (197 ft) with Vision Enhancer

Zoom Mode

2.36x Optical

Face Recognition

✓

License Plate Recognition

✓

Smart Detections (People, Vehicles, Animals)

✓

Resolution

4K

Field of View

Wide: H: 113.8°, V: 61.9°, D: 134°
Tele: H: 45.5°, V: 25.8°, D: 52°

Audio	Two-way audio
Weatherproofing	IP66
Tamper Resistance	IK04
Mounting	Wall, Ceiling, Pole mount (Included) Junction Box, Angled Base (Optional)

Performance

Networking Interface	GbE RJ45 port
Video	
<ul style="list-style-type: none">• Image Settings	Color, brightness, sharpness, contrast, white balance, exposure control, 2DNR, 3DNR, NR by motion, masking, text overlay, HDR
<ul style="list-style-type: none">• Max. Frame Rate	30 FPS
<ul style="list-style-type: none">• Resolution	8MP 3840 x 2160 (16:9)
Optics	
<ul style="list-style-type: none">• Sensor	1/1.2" 8MP
<ul style="list-style-type: none">• Lens	F 5.9-13.8 mm; <i>f</i> /1.5- <i>f</i> /2.9
<ul style="list-style-type: none">• Night Mode	Built-in adaptive IR LED illumination and IR cut filter

Hardware

Max. Power Consumption	15W
Supported Voltage Range	37-57V DC
Power Method	PoE+
Processor	Quad-core Arm® Cortex®-A53 based chip
Pole Mount Diameter	1.5-2" (38-50 mm)

Weight	Without mount: 755 g (1.7 lb) With mount: 980 g (2.2 lb)
Enclosure Material	Polycarbonate, aluminum alloy
Mount Material	Wall mount: aluminum alloy, polycarbonate Pole mount: aluminum alloy
Expansion Slot	MicroSD card
Button	(1) Factory-reset
Ambient Operating Temperature	-20 to 50° C (-4 to 122° F)
Ambient Operating Humidity	0 to 90% noncondensing
NDAA Compliant	✓
Certifications	CE, FCC, IC

For more information about this product or other Ubiquiti products, please visit: <https://techspecs.ui.com>